




BULLDOG SEAL Data Sheet

Acme Reg. No. 0203098
Design Reg. No.2032028

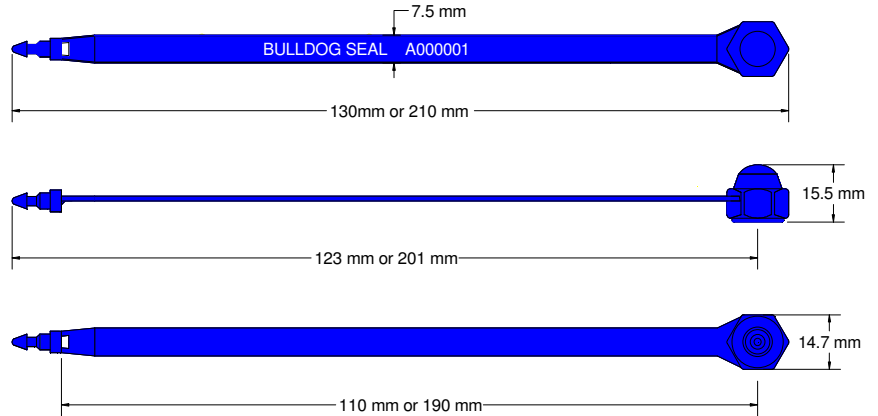

The Acme **Bulldog Seal** is a fixed length seal manufactured from two dissimilar materials. The Acetyl insert is durable and will withstand freezing and boiling conditions, whilst the polypropylene body is flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body, which provides clear evidence of tampering if forced open or cut and a break off point for easy removal. This seal is ideal for securing vehicle doors and fire doors but is also suitable for other sealing requirements.

Technical Data

Recommended Applications

Airlines, Cargo, Trailers, Containers, Rail freight, Plantations, Refineries, Vehicles, Fire doors, Lockers.

Material

Body - Polypropylene
Insert - Acetyl

Available Operating Lengths

(L1) 11cm (overall 13cm)
(L2) 19cm (overall 21cm)

Strap Width

7.5mm

Average Breaking Strength

20kg

Marking

Laser or Foil marking
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser Barcoding

Colours

Foil marked: red, blue, green, yellow, orange, black, white
Laser or foil marked: pastel shades of pink, blue, green, yellow and peach, also black and white.
Other colours may be available on request.

Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton
Carton Dimensions : (L1) - 33cm x 25.4cm x 25.6cm
: (L2) - 33cm x 25.4cm x 25.6cm
Carton weight : (L1) - 3.0kg/carton
: (L2) - 3.7kg/carton