




H SEAL Data Sheet

Acme Reg. No. 14041410

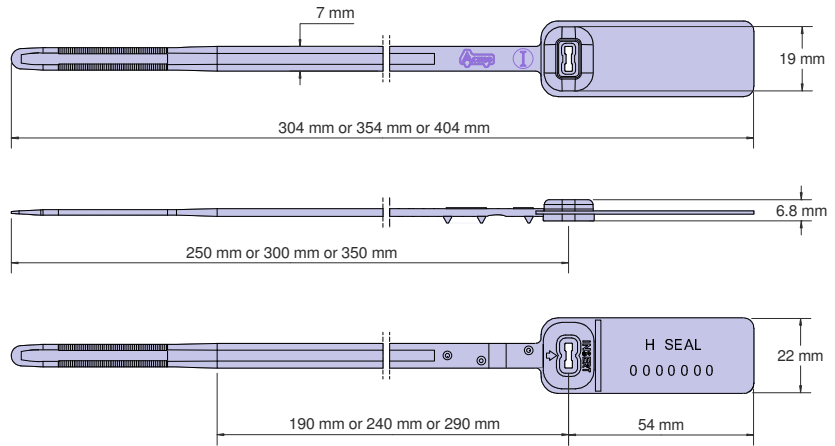

The Acme **H Seal** is a smooth ribbon, pull-tight seal manufactured from Polypropylene material. The design features rolled heat staking technology to secure the metal spring insert to the body, which provides clear evidence of tampering if forced open or cut. The seal can be manufactured with or without gripping spikes, making this seal suitable for many applications where strength is the requirement.

Technical Data

Recommended Applications

Airlines, Cargo, Trailers, Tankers, Rail & Sea Freight, Containers, Refineries, Warehouses, Cash bags, Postbags, Valves, Hatches, Lockers.

Material

Body - Polypropylene
Insert - Spring Stainless Steel

Available Operating Lengths

(L1) 25cm (overall 30.4cm)
(L2) 30cm (overall 35.4cm)
(L3) 35cm (overall 40.4cm)

Strap Width

7mm

Tag Marking Dimensions

22mm x 45mm

Average Breaking Strength

65kg

Marking

Laser, Foil or Thermo Transfer
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser or Thermo Transfer Barcoding

Colours

Foil or Thermo Transfer: red, blue, green, yellow and orange, black, white.
Laser: pastel shades of pink, blue, green, yellow and peach, also black and white.
Thermo Transfer: all of the above
Other colours may be available on request.

Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton
Carton Dimensions : (L1) - 47cm x 33.5cm x 19cm
: (L2) - 47cm x 38.5cm x 19cm
: (L3) - 47cm x 43.5cm x 19cm
Carton weight : (L1) - 5.55kg/carton
: (L2) - 6.20kg/carton
: (L3) - 7.02kg/carton